

Flexibility

at an attractive price



BÖWE SYSTEC GmbH
Werner-von-Siemens-Str. 1 | 86159 Augsburg | Germany
Phone +49 821 5702-0 | Fax +49 821 5702-234
info@boewe-systec.com | www.boewe-systec.com

Managing Directors:
Joachim Koschier | Dirk van Vinckenroye
Registered Office: Lübeck | Local Court HRB 10736 HL
VAT ID DE274185634

Order No. 17/146 | Printed in Germany | 03/2018
May be subject to technical changes or errors
Contains exemplary illustrations



C6→C5
#7 3/4→6 x 9



2 mm/0.08"



100,000 sheets/h



26,000 env/h



1 channel



7 mm/0.28"

9GSMART

The complete package at the right price

Anyone looking for excellent flexibility at an attractive price won't find a more suitable inserting system than the 9G Smart. As the smallest and fastest in its class, processing up to 26,000 envelopes per hour, it is the ideal entry-level machine in the high-performance segment. Despite its extremely small footprint 9G Smart has the capabilities of a high-performance system. As 9G Smart both provides processing of assembling before and after folding, it is ideally suited for jobs with mid or high page counts. Depending on the application, 9G Smart is available in five standardized configurations.



Equipped with **standard components** of the successful and market-proven **9G series**, 9G Smart offers simple handling and efficient processing with maximum integrity



Despite its extremely **small footprint** 9G Smart has the capabilities of a high-performance system



Excellent price-performance ratio for a powerful, high-performance machine



Depending on the material to be processed, 9G Smart is available in **five different infeed channel configurations**



Diverse options offer **a high level of flexibility** and form the foundation for a high degree of automation in the production process



Minimization of changeover times and increase of productivity through **BIPS**

High-performance standards for each requirement

Depending on the type of material to be processed, 9G Smart is available in five standard infeed channel configurations. Additionally, there are four individual enclosure feeders as standard, the powerful inserting module of the latest 9G inserting system as well as the corresponding envelope feeding and stacking components.



Configuration I:



Documents from the infeed channel

- › Continuous forms
- › Pinfeed
- › 2-up
- › Up to 42,000 sheets/h
- › Width net: 165 mm – 216 mm (per column – 2-up)
- › Height net: 8" – 14"
- › Paper weight: 70 – 120 g/m²

Configuration II:

Documents from the infeed channel


- › Continuous forms
- › Pinless
- › 2-up
- › Up to 37,000 sheets/h
- › Width net: 165 mm – 216 mm (per column – 2-up)
- › Height net: 8" – 14"
- › Paper weight: 70 – 120 g/m²

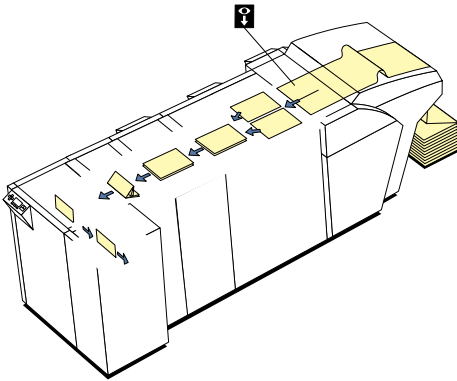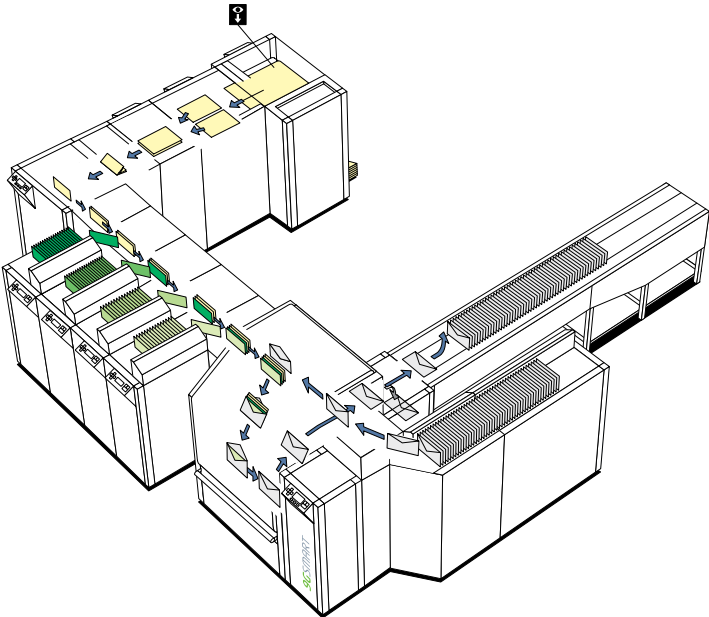

Configuration III:

Documents from the infeed channel


- › Continuous forms
- › Pinless
- › 2-up
- › Up to 54,000 sheets/h
- › Width net: 165 mm – 216 mm (per column - 2-up)
- › Height net: 8" – 14"
- › Paper weight: 70 – 120 g/m²

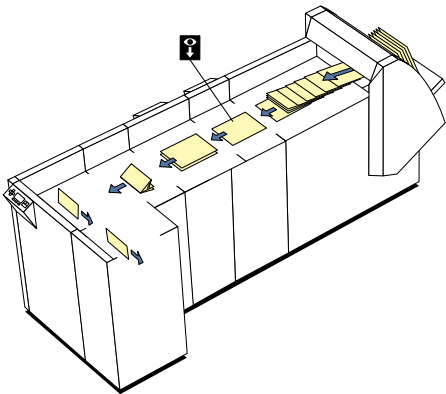

Configuration IV:

Documents from the infeed channel

- › Cut-sheet processing
- › 1-up
- › Up to 44,000 sheets/h
- › Width: 210 mm – 220 mm (1-up)
- › Height: 8 1/2" – 14"
- › Paper weight: 70 – 120 g/m²

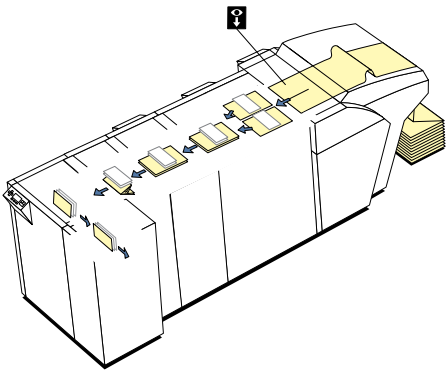


Configuration V:

Documents from the infeed channel

- › Continuous forms
- › Pinless
- › 2-up
- › Up to 70.800 Blatt/h
- › Width net: 173 mm – 216 mm (per column - 2-up)
- › Height net: 3 4/6" – 14"
- › Paper weight: 70 – 120 g/m²

Technical Data

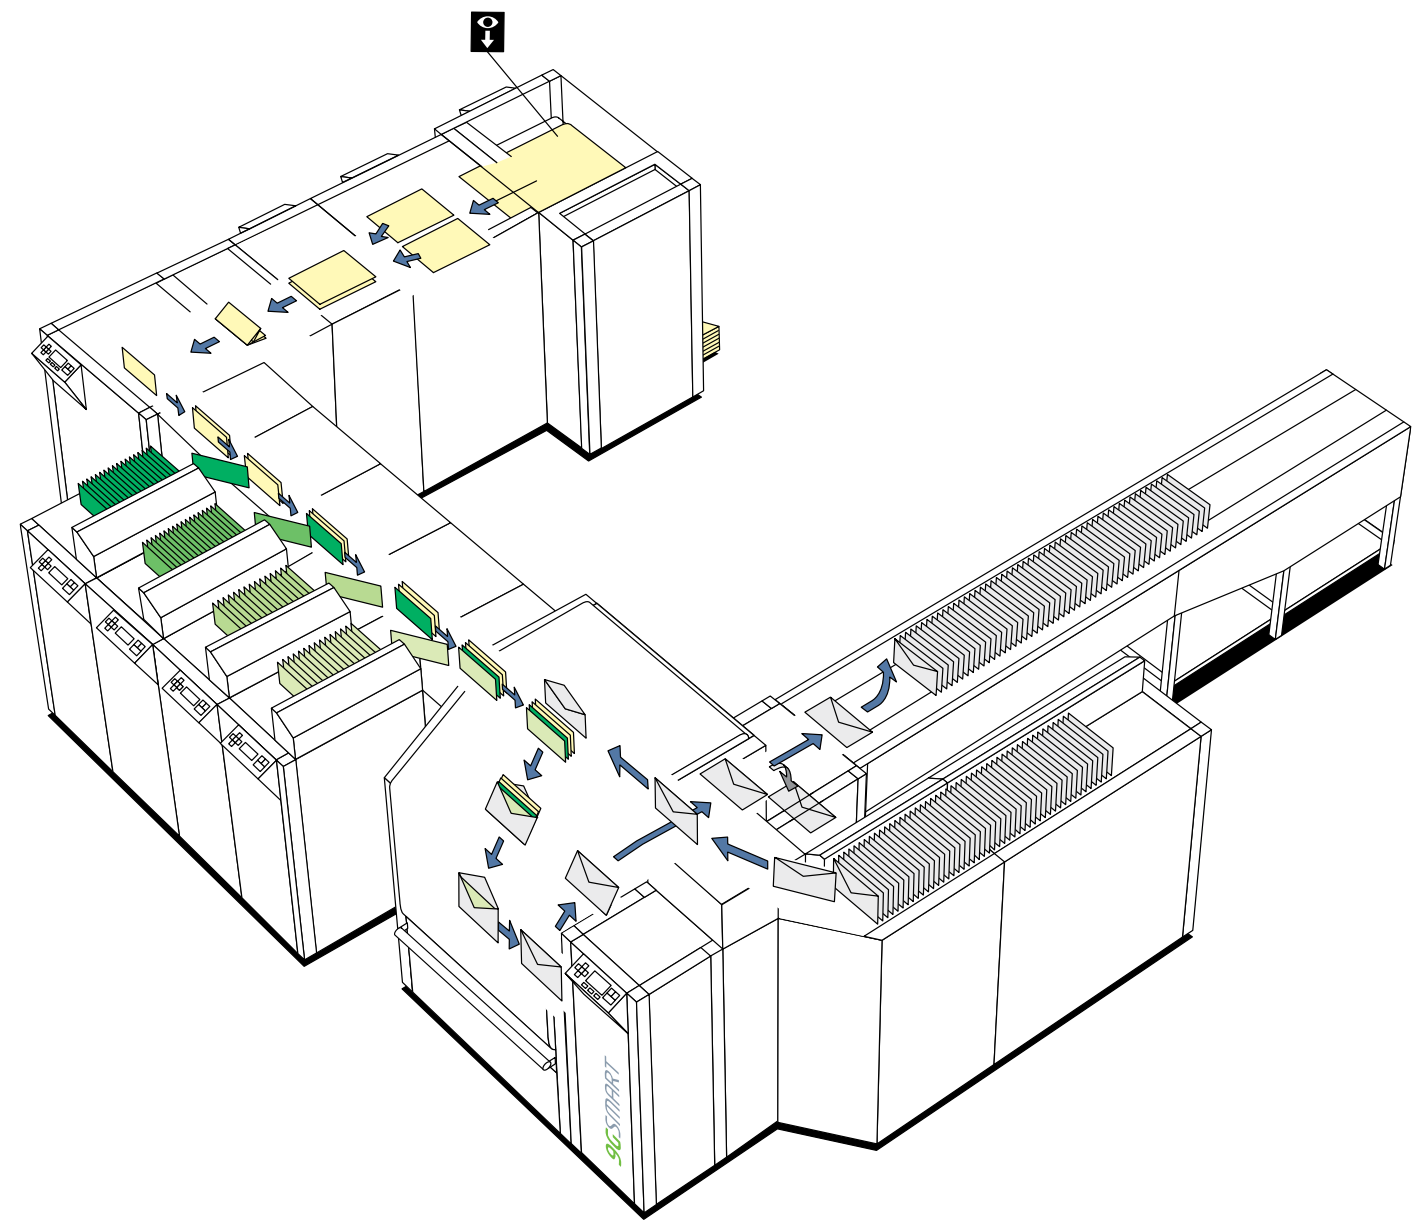

Max. performance			
C6, B6, B6+, DL, C6/5 #7 3/4, #10	up to 26,000 env/h	C5 6 x 9	up to 22,000 env/h

Enclosures			
Max. number	14 enclosure feeders		
Width	125 mm – 220 mm	Height	70 mm – 153 mm
Thickness	0.06 mm – 2 mm	Paper weight	60 – 160 g/m²

Envelopes			
Width	160 mm – 248 mm	Feeder capacity	approx. 2,700 envelopes
Height	90 mm – 162 mm	Paper weight	75 – 100 g/m²

Max. inserting package	
Thickness	up to 7 mm